

M-MAG-SW-1

MAGNETIC SWITCH FOR DOORS AND CABINETS

Ideal for controlling cabinet or door lighting, automatically turning lights on or off based on door position. For use with Metro M-LIGHT LEDs, M-LINEAR Fixtures, and M-DRIVER Power Supplies

* Normally Open Contact Configuration versions are available, not shown.

M-MAG-SW-1

Features:


Working Voltage	24 V DC
Contact Configuration	Normally Closed
Max Switching Current	0.500 A
Max Initial Contact Resistance	0.150 Ohms
Max Contact Rating	10 W
Operating Temp	-15°F -160°F (-26.1°C to 71.1°C)
SWITCH:	
Overall Length	1.28" (32.5mm)
Flange Height	0.417" (10.6mm)
Body Height	0.354" (9.0mm)
MAGNET:	
Overall Length	1.28" (32.5mm)
Flange Height	0.417" (10.6mm)
Body Height	0.354" (9.0mm)

- DETECTS THE OPENING AND CLOSING OF DOORS AND CABINETS
- EASY TO INSTALL (FLUSH MOUNT OR COUNTER SUNK)
- CONSISTS OF SWITCH AND MAGNET
- STANDARD 12 INCH LEADS #22AWG
- 1/2 INCH PLUS STANDARD GAP
- AVAILABLE IN WHITE OR BLACK



M-MAG-SW-1

MAGNET

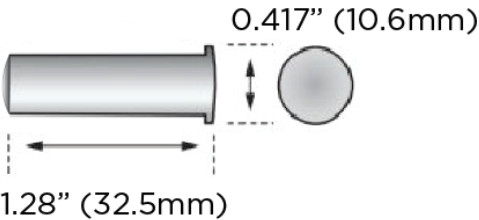

SWITCH

