

M-MAG-SW-2

MAGNETIC SWITCH FOR DOORS AND CABINETS

Ideal for controlling cabinet or door lighting, automatically turning lights on or off based on door position. For use with Metro M-LIGHT LEDs, M-LINEAR Fixtures, and M-DRIVER Power Supplies

* Normally Open Contact Configuration versions are available, not shown.

M-MAG-SW-2

Features:


Working Voltage	24 V DC
Contact Configuration	Normally Closed
Max Switching Current	0.500 A
Max Initial Contact Resistance	0.150 Ohms
Max Contact Rating	10 W
Operating Temp	-15°F -160°F (-26.1°C to 71.1°C)
SWITCH:	
Overall Length	0.992" (25.2mm)
Flange Height	0.937" (23.8mm)
Body Height	0.74" (18.7mm) / 0.55" (14mm)
MAGNET:	
Overall Length	0.992" (25.2mm)
Flange Height	0.937" (23.8mm)
Body Height	0.74" (18.7mm) / 0.55" (14mm)

- DETECTS THE OPENING AND CLOSING OF DOORS AND CABINETS
- EASY TO INSTALL (FLUSH MOUNT OR COUNTER SUNK)
- CONSISTS OF SWITCH AND MAGNET
- STANDARD 12 INCH LEADS #22 AWG
- 1/2 INCH PLUS STANDARD GAP
- AVAILABLE IN WHITE OR BLACK



M-MAG-SW-2

MAGNET

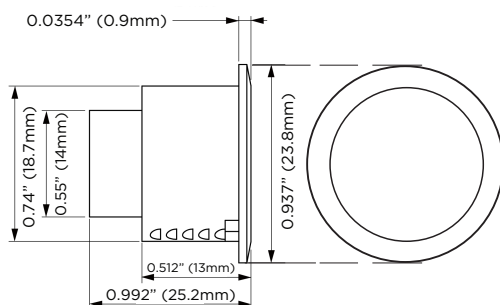

SWITCH

