

M-MAG-SW-3

MAGNETIC SWITCH FOR DOORS AND CABINETS

Ideal for controlling cabinet or door lighting, automatically turning lights on or off based on door position. For use with Metro M-LIGHT LEDs, M-LINEAR Fixtures, and M-DRIVER Power Supplies

* Normally Open Contact Configuration versions are available, not shown.

M-MAG-SW-3


Features:	Working Voltage	24 V DC
	Contact Configuration	Normally Closed
	Max Switching Current	0.500 A
	Max Initial Contact Resistance	0.150 Ohms
	Max Contact Rating	10 W
	Operating Temp	-4°F -176°F (-20°C to 80°C)
	SWITCH:	
	Overall Length	0.992" (25.2mm)
	Flange Height	0.937" (23.8mm)
	Body Height	0.74" (18.7mm) / 0.55" (14mm)
	MAGNET:	
	Overall Length	0.992" (25.2mm)
	Flange Height	0.937" (23.8mm)
	Body Height	0.74" (18.7mm) / 0.55" (14mm)

- DETECTS THE OPENING AND CLOSING OF DOORS AND CABINETS
- EASY TO INSTALL (SURFACE MOUNTED)
- CONSISTS OF SWITCH AND MAGNET
- STANDARD 12 INCH LEADS #22 AWG
- 3/8 INCH PLUS STANDARD GAP
- AVAILABLE IN WHITE OR BLACK


* Mounting Hardware Included



M-MAG-SW-3

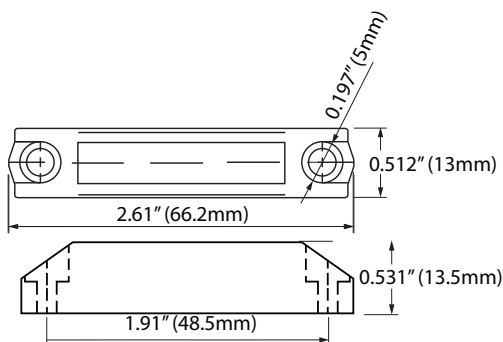

MAGNET

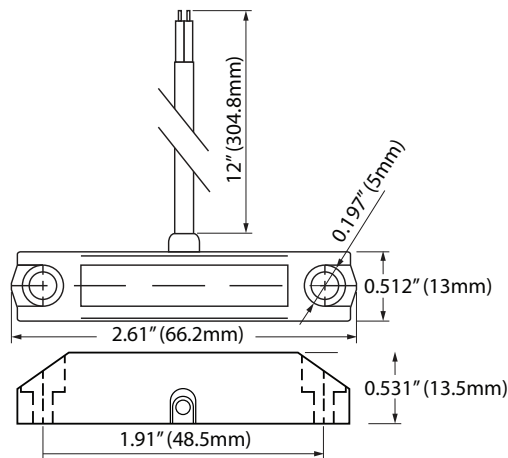

SWITCH